

	DOCUMENT NO:	CDS-L612nn-216XXXX-YYY-ZZZ-EVO-X	VER:	1.0
	EVO Max Cartridge, Thermoplastic			EFFECTIVE DATE:
APPROVAL:	ECO-340	Jupiter PN(s):	L612nn-216XXXX-EVO-X	PAGE 1 OF 5

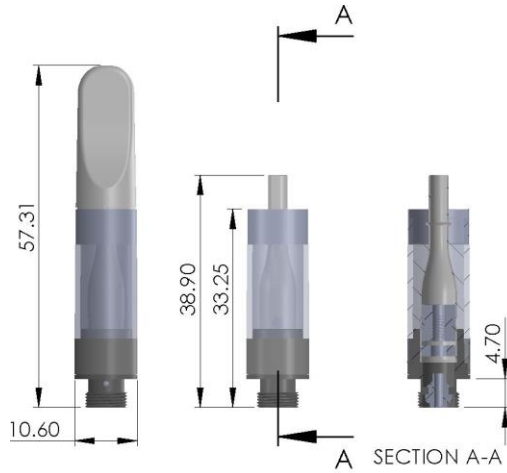


**Standard Airway**

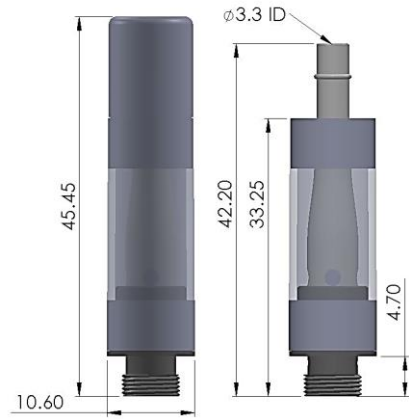


**Enlarged Airway**

**0.5ml**

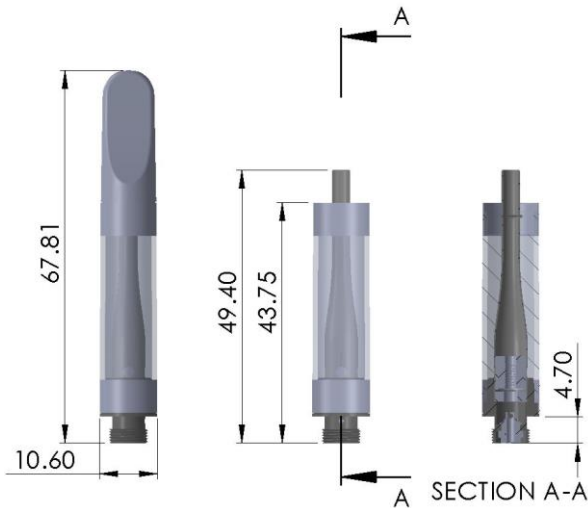

**Standard Airway**

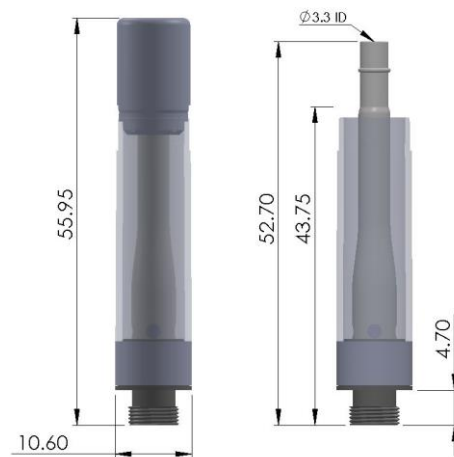


**Enlarged Airway**

**1.0ml**

\*All dimensions are in mm


**Description:** Top fill vaporizer cartridge

		DOCUMENT NO:	CDS-L612nn-216XXXX-YYY- ZZZ-EVO-X	VER:	1.0
		EVO Max Cartridge, Thermoplastic			EFFECTIVE DATE: See ECO
APPROVAL:	ECO-340	Jupiter PN(s):	L612nn-216XXXX-EVO-X	PAGE 2 OF 5	

**Features:**


- CCELL EVO Max Technology atomizer – heating element embedded in porous ceramic
- Tamper proof snap-fit mouthpiece
- 510 connection – M7 threaded connection
- All oil compatibility, operational viscosity ranges from 1,000 – 5,000,000 cPs @ 25°C [77°F]
- Anti-Clog and Anti-leak; available in enlarged airway to reduce further clogs
- True-to-strain tastes
- Available in varying powers and fluid inlet sizes to customize vapor feel and taste

Specifications		
Version (size)	0.5 ml	1.0 ml
Max. fill volume	0.50 ml	1.00 ml
Weight, empty	5.3g	5.8g
	5.3g (Enlarged Airway)	5.9g (Enlarged Airway)
Power	Standard power is 7W; Other options available upon request.	
Resistance	1.7Ω, Standard. See part number legend for other options.	
Fluid Inlet Diameter	Ø2.0mm Standard. See part number legend for other options.	
Number of Inlets	4	
Viscosity Range	1,000 – 2,000,000 cPs @ 25°C [77°F] (EVO Max standard airway) 2,000,000 – 5,000,000 cPs @ 25°C [77°F] (EVO Max 3.3mm enlarged airway)	
Wetted Materials	Fluid Housing	Eng. Thermoplastic (proprietary)
	Sleeves	Stainless Steel (SS)
	Airway tube & Heater base	Stainless Steel (SS)
	Heating element	Nichrome
	Wick	CCELL EVO Max
	Atomizer retaining wrap	Cellulose

	DOCUMENT NO:	CDS-L612nn-216XXXX-YYY-ZZZ-EVO-X	VER:	1.0
	EVO Max Cartridge, Thermoplastic			EFFECTIVE DATE: See ECO
APPROVAL:	ECO-340	Jupiter PN(s):	L612nn-216XXXX-EVO-X	PAGE 3 OF 5

	Seals	Silicone
Branding Options	Available with MOQ	
Recommended Operating Conditions	Working Temperature: -10°C to 60°C	Working Humidity: 35% - 70%
Recommended Storage Conditions	Storage Temperature: 23°C – 28°C	Storage Humidity: 35% - 70%
Recommended Assembly force	35-53lbf	
Shipping conditions	<p>Transport temperature: 23 ± 5°C</p> <p>Relative humidity: 35~70%RH</p> <p>Atmospheric pressure: 86kpa~106kpa</p> <p>The means of transport must be clean and hygienic, and the products should be handled with care and stacked according to maximum stacking rules. Do not mix with toxic or odorous items during transportation. The product should be protected from rain, moisture, sun exposure, and severe vibration or rough handling during transportation. If the Injection cartridge needs to be transported across the region, it is recommended that: ① horizontal storage, ② sealed packaging, such as candy bags, capsules, etc. ③ The air pressure during transportation was between 86kpa and 106kpa</p>	
Safety Certifications	<ul style="list-style-type: none"> <li>RoHS</li> <li>Food contact tested wetted materials</li> </ul>	
<b>Part Number Legend – L612nn-216XXXX-YYY-ZZZ-EVO-X-F</b>		
<ul style="list-style-type: none"> <li>nn -&gt; Cartridge Volume <ul style="list-style-type: none"> <li>05 for 0.5g</li> <li>10 for 1.0g</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>YYY -&gt; Cartridge Power <ul style="list-style-type: none"> <li>000 for 1.7ohm, Standard</li> <li>140 for 1.4ohm</li> <li>019 for 1.9ohm</li> <li>210 for 2.1ohm</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>ZZZ -&gt; Fluid Inlet Dia. <ul style="list-style-type: none"> <li>000 for 2.0mm, Standard</li> <li>112 for 1.2mm</li> <li>016 for 1.6mm</li> <li>222 for 2.2mm</li> </ul> </li> </ul>
<ul style="list-style-type: none"> <li>Enlarged Airway -&gt; 3.3mm <ul style="list-style-type: none"> <li>L612nn-216XXXX-133-EVO-X</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>Foam tray suffix -&gt; '-F' <ul style="list-style-type: none"> <li>5x10 foam (14mm spacing)</li> </ul> </li> </ul>	

\*XX digits denote product branding

		DOCUMENT NO:	CDS-L612nn-216XXXX-YYY- ZZZ-EVO-X	VER:	1.0
		EVO Max Cartridge, Thermoplastic			EFFECTIVE DATE: See ECO
APPROVAL:	ECO-340	Jupiter PN(s):	L612nn-216XXXX-EVO-X	PAGE 4 OF 5	

### Liquid 6, EVO Max ETP Snap-fit Cartridge Filling Instructions


Failure to follow these instructions may result in cartridge leakage or poor performance.

Jupiter Liquid 6, ETP EVO Max Cartridges are top-fill cartridges available in 0.5, 1.0ml versions. The two versions differ only in the length of the reservoir. If you are unsure which version you have, measure the length without the mouthpiece. Refer to the drawing on page 1 to determine where to measure and which cartridge you have.

Multiple mouthpiece styles are available. All press on in the same manner.

### Filling Instructions

1. Insert a blunt tipped needle (14 ga. or smaller) into the space between the airway and the outer wall of the cartridge (see the image, below).

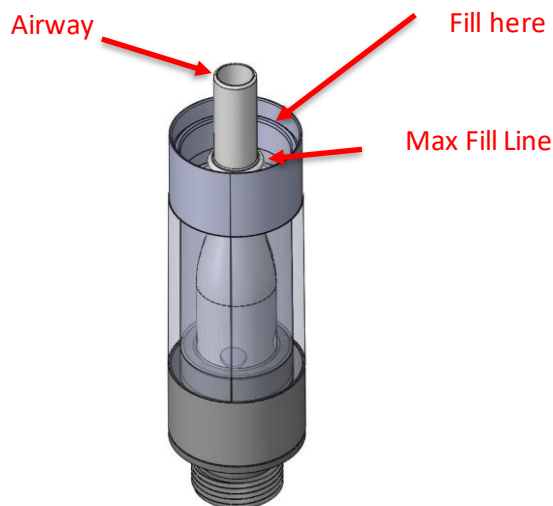


While the cartridge is oriented vertically with the threaded connector downward, fill the cartridge through the needle. Do not overfill.

**Caution:** Do not allow fluid to enter the airway (center tube).

2. Immediately after filling, insert and press-fit the mouthpiece until it is fully seated. Mechanical assistance, such as an arbor press or channel lock pliers, is required to fully seat the mouthpiece. Damage to the cartridge can be caused when forces are above 100lbf.

**Caution:** Failure to install the mouthpiece within 2 minutes of filling may result in leakage.

3. Cartridges should be allowed to stand for at least 30 minutes before use to allow the atomizer to saturate and create headspace. The rate that the atomizer saturates is dependent upon the viscosity of the fluid. More viscous fluids may require more time.

		DOCUMENT NO:	CDS-L612nn-216XXXX-YYY- ZZZ-EVO-X	VER:	1.0
		EVO Max Cartridge, Thermoplastic			EFFECTIVE DATE: See ECO
APPROVAL:	ECO-340	Jupiter PN(s):	L612nn-216XXXX-EVO-X	PAGE 5 OF 5	

**Caution:** If cleaning the cartridge housing after filling and capping, use a diluted solution of <70% alcohol to avoid fogging

**Caution:** Jupiter cartridges are disposable and for single use only. Do not refill or use Jupiter cartridges with tobacco derived products.

4. If the cartridge/device is to experience a pressure change because of an increase in temperature or a change in elevation, the cartridge/device must be shipped with the MP facing down, allowing for the inlets to be exposed to ambient air.

For Technical Assistance please contact us at: [CS@JupiterResearch.com](mailto:CS@JupiterResearch.com)